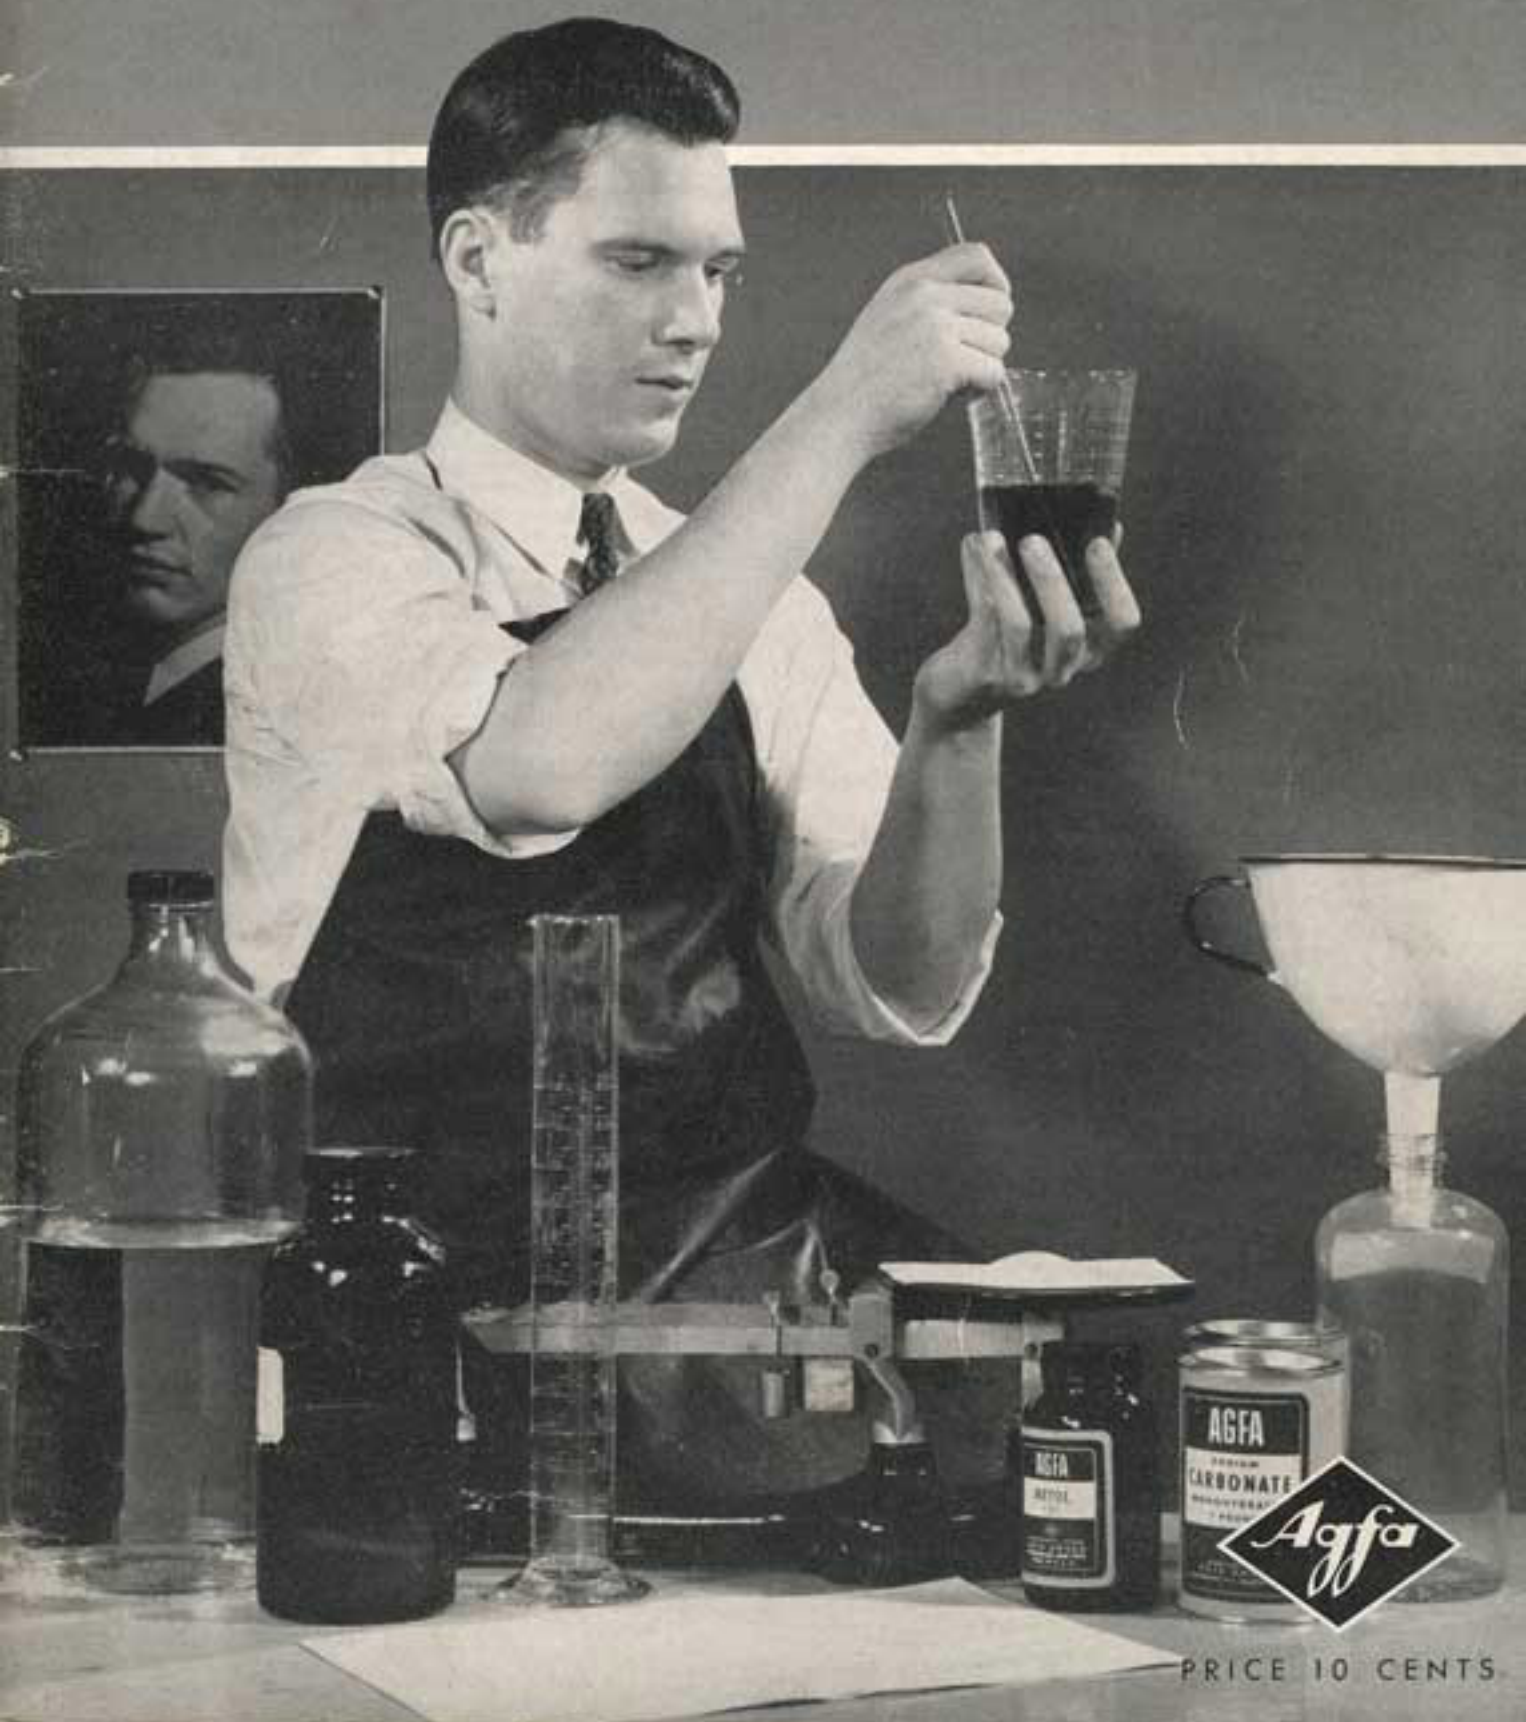


AGFA FORMULAS

FOR PHOTOGRAPHIC USE



PRICE 10 CENTS

CONTENTS

CHEMISTRY FOR THE PHOTOGRAPHER

Agitation.....	7
Compensation of non-standard temperatures...	6
Components and action of developers.....	1
Composition and function of fixer.....	5
Developer exhaustion.....	3
Importance and use of short-stop.....	4
Suggestions for trouble-free mixing.....	5

AGFA FORMULAS

Desensitizers.....	28
Developers.....	8-20
Fixers.....	21-22
Reducers, Intensifiers.....	26-27
Toners.....	23-25
Rapid processing procedure.....	29
Two-tray developing procedure.....	19
Agfa Photographic Chemicals and Preparations	31

ALPHABETICAL INDEX

Agfa No.	Name	Page
201	Acid Hardening Fixer.....	21
210	Acid Short-Stop.....	22
113	Amidol Paper Developer.....	17
202	Chrome Alum Fixer.....	21
216	Chrome Alum Hardening Bath.....	22
332	Chromium Intensifier.....	27
110	Direct Brown-Black Paper Developer.....	17
310	Farmer's Reducer.....	26
17	Fine-Grain Borax Tank Developer.....	8
17M	F. G. Metaborate Tank Developer.....	8
311	Flattening Reducer.....	26
72	Glycin Developer.....	14
115	Glycin Hydroquinone Developer.....	18
231	Gold Toner.....	25
73	High Contrast M-H Tray Developer.....	14
90	High Contrast M-H Tray Developer.....	16
70	Hydroquinone Caustic Developer.....	14
222	Hypo Alum Toner.....	23
241	Iron Blue Toner.....	25
20	M-H Positive Developer.....	9
42	M-H Tank Developer.....	10
22	M-H Title Developer.....	9
40	M-H Tray Developer.....	10
61	M-H Tray Developer.....	13
330	Mercury Intensifier.....	26
48M	Metaborate Developer.....	12
47	Metol Hydroquinone Developer.....	11
125	Metol Hydroquinone Developer.....	19
331	Monckhoven's Intensifier.....	27
223	Nelson Gold Toner.....	24
203	Non-hardening Metabisulphite Fixer.....	22
103	Paper Developer.....	16
125	Paper and Film Developer.....	19
79	Paraformaldehyde Developer.....	15
351	Pinakryptol Green Desensitizer.....	28
352	Pinakryptol Yellow Desensitizer.....	28
45	Pyro Developer.....	11
64	Rapid M-H Tropical Developer.....	13
17	Replenisher for.....	8
17M	Replenisher for.....	11
47	Replenisher for.....	12
48M	Replenisher for.....	12
81	Reprolioth Developer.....	15
221	Sepia Toner.....	23
120	Soft-working Paper Developer.....	18
130	Universal Paper Developer.....	20
135	Warm-toned Paper Developer.....	20
30	X-Ray Developer.....	10

NUMERICAL INDEX

Agfa No.	Name	Page
17	Fine-Grain Borax Tank Developer.....	8
17A	Replenisher.....	8
17M	F. G. Metaborate Tank Developer.....	8
17M	Replenisher.....	9
20	M-H Positive Developer.....	9
22	M-H Title Developer.....	9
30	X-Ray Developer.....	10
40	M-H Tray Developer.....	10
42	M-H Tank Developer.....	10
45	Pyro Developer.....	11
47	Metol Hydroquinone Developer.....	11
47A	Replenisher.....	12
48M	Metaborate Developer.....	12
48M	Replenisher.....	12
61	M-H Tray Developer.....	13
64	Rapid M-H Tropical Developer.....	13
70	Hydroquinone Caustic Developer.....	14
72	Glycin Developer.....	14
73	High Contrast M-H Tray Developer.....	14
79	Paraformaldehyde Developer.....	15
81	Reprolioth Developer.....	15
90	High Contrast M-H Tray Developer.....	16
103	Paper Developer.....	16
110	Direct Brown-Black Paper Developer.....	17
113	Amidol Paper Developer.....	17
115	Glycin Hydroquinone Developer.....	18
120	Soft-working Paper Developer.....	18
125	Paper and Film Developer.....	19
130	Universal Paper Developer.....	20
135	Warm-toned Paper Developer.....	20
201	Acid Hardening Fixer.....	21
202	Chrome Alum Fixer.....	21
203	Non-hardening Metabisulphite Fixer.....	22
210	Acid Short-Stop.....	22
216	Chrome Alum Hardening Bath.....	22
221	Sepia Toner.....	23
222	Hypo Alum Toner.....	23
223	Nelson Gold Toner.....	24
231	Gold Toner.....	25
241	Iron Blue Toner.....	25
310	Farmer's Reducer.....	26
311	Flattening Reducer.....	26
330	Mercury Intensifier.....	26
331	Monckhoven's Intensifier.....	27
332	Chromium Intensifier.....	27
351	Pinakryptol Green.....	28
352	Pinakryptol Yellow.....	28

(Gallon, quart and fluid ounce quantities listed are expressed in U. S. liquid measure.)

CHEMISTRY FOR THE PHOTOGRAPHER

PHOTOGRAPHERS everywhere realize the importance which chemistry holds in photographic work, but often consider the subject too formidable and involved for application to their own work. This discussion has been prepared to help dispel that fear, and to show that theoretical knowledge is unimportant if the photographer knows in a practical way, what is in a developing or fixing solution, why it is there and how it accomplishes its own particular job.

The general structure of photographic film, its components of nitro cellulose (or acetyl cellulose) base, emulsion coating of gelatin which contains suspended particles of light-sensitive silver salt, and auxiliary layers for such purposes as prevention of halation, are common knowledge among photographers. The chemistry involved in this branch of the science is held under precise control by the manufacturer and causes the photographer little concern. Photographic chemistry begins to affect the photographer more directly in the developing and fixing operations carried out with film and paper. It is therefore well worth while to consider first the composition and function of the developing solution to see what it contains and what it does to effect development.

When a photographic emulsion is exposed to light, the silver salt (silver bromide, chloride or iodide) which the light reaches, undergoes a definite though invisible change to form what is known as the latent image. It is not yet definitely known just how this change takes place, but it is believed that the exposed parts of the emulsion gain a certain "activation" that makes them susceptible to the reducing action of a developer. When placed in a developing solution the exposed, "activated" particles of silver salt are reduced chemically to black metallic silver, leaving the unexposed particles of silver salt unchanged. Reduction in this sense does not

have the meaning commonly thought of in the photographic field, namely, the lessening of density in a film negative. This *chemical* reduction is a conversion of the silver salt to free silver and for the reaction one or more *reducing agents*—which photographers call "developers" are necessary.

THE DEVELOPER'S BASIC COMPONENT

There are many chemicals which are reducing agents, but most of them are too powerful to be used for developing because they reduce all the silver salt in the emulsion without regard to the latent image which exposure in the camera has produced. Therefore a reducing agent must be selected which is satisfactory as a developer and which confines its action to the exposed particles of silver salt, leaving the remainder unaffected. Of the reducing agents that are satisfactory for photographic use, metol, hydroquinone and pyro are most commonly used, and there are in addition other developing agents such as glycin, amidol and rodinal frequently employed. There are also several developing agents on the market under different names from metol, but which are basically the same chemical—monomethyl-para-amino-phenol-sulphate.

As has been indicated, the chemical action of these developing agents is fundamentally the same. The photographic effect, however, depends to a large extent on the particular developing agent and the way in which it is used. Thus many developers contain a combination of developing agents, and one formula may have, for example, a high percentage of hydroquinone to produce brilliant photographic images while another formula may use a larger ratio of metol to produce softer results.

It is obvious therefore, that great care should be taken in the preparation of developing solutions, for a slight error in the type or amount of the developing agents (or the other constituents too, for that matter) may have a serious effect on the behavior of the developer. Most successful photographers have found that it is far wiser to use the formulas recommended by the manufacturer and to make sure solutions are carefully and accurately mixed, than to spend time on individual experimenting or research. The use of recommended formulas is undoubtedly one of the most important helps to getting good results in film development.

OTHER INGREDIENTS OF THE DEVELOPING SOLUTION

The function and importance of the developing agent in the developer have both been mentioned—but there are three other components which also play an important role in any developing solution. The first of these is the alkali—which is ordinarily essential for development. Most of the developing agents in use today are neutral or slightly acid in their normal state, and in this condition give little or no developing action. However, when an alkaline salt like sodium carbonate is introduced into the solution containing the developing agent, a very interesting change takes place. The developing agent forms what is called an alkaline salt which in a photographic sense is a more active material, and it is this alkaline salt of the developing agent that actually reduces the exposed grains of silver salt to metallic silver. The alkali has a secondary effect in the developing solution which is also important. It helps the gelatin emulsion to swell and thus facilitates the penetration of the developing solution throughout the network layer of the emulsion.

It is obvious that the alkali is a really important component of the developing solution and it is likewise evident that care must be exercised in using the right kind and correct amount of alkali. Sodium carbonate is normally recommended though potassium carbonate is sometimes used in its place. The caustic alkalis, sodium hydroxide and potassium hydroxide, should not be substituted unless definitely specified as they are much stronger and can easily cause fog. Normally they are used only in special-purpose developers giving high contrast. Borax and similar alkalis which are less energetic are often specified for fine-grain development in which grain size must be controlled by softer development. Another alkali used for photographic work is sodium metaborate which is helpful in reducing blister formation where it is difficult to control the temperature of processing solutions during hot weather.

The amount of alkali should of course be weighed accurately to the amount specified, as too much may cause fog in developed negatives; too little may result in slow, soft development. It is important to remember when using carbonate, that the potassium salt is generally available only in the anhydrous form, while the more generally used sodium salt can be obtained as (1) the anhydrous salt containing about 2% water, (2) the monohydrated salt containing about 15% water, or (3) in crystal form containing about 63% water. The anhydrous and crystalline forms are both unstable at ordinary conditions of temperature and humidity, and must be kept in tightly sealed containers and used with great care to prevent considerable absorption of water from the atmosphere by the anhydrous salt, or loss of water by the crystalline form. The monohydrated form of sodium carbonate is stable and therefore preferred by most photographers for accurate preparation of developing solutions.

THE IMPORTANCE OF A PRESERVATIVE

It is a characteristic of many photographic reducing agents in alkaline solutions to combine freely and easily with oxygen. Because of this "hunger" for oxygen, alkaline solutions of the developing agents spoil very quickly when exposed to air. To increase their useful life, to allow the developing agent to do its work on the exposed silver halide as desired, and to prevent the occurrence of stains, a preservative must be added to the developing solution.

Sodium sulphite is ordinarily used as the preservative, though in developers prepared for stock in two solutions, preservatives which are slightly acid in solution such as sodium bisulphite and potassium metabisulphite are preferred. Because developing agents keep better in acid solution than in one which is alkaline, it is common practice to use one of these acid sulphites as the preservative in the developer part of the stock solution. In single-solution developers, sodium bisulphite is never used alone as a preservative since it neutralizes some of the alkali in the solution and would result in softer development. One other interesting point about preservatives is that in some cases the preservative performs a secondary function in the developer. In some fine-grain developers, for instance, a large amount of sodium sulphite is used to aid in keeping grain size at a minimum.

The fourth and final important component of the typical developing solution is the restrainer, potassium bromide. This necessary constituent of the developing solution acts as a "brake" on the chemical reaction of development and keeps the operation under control. The action of the restrainer is such that an increase in the concentration of potassium bromide in the developer tends to slow down or "restrain" the development of the photographic image. The concentration of potassium bromide in the solution is obviously important, for too much may retard develop-

ment excessively and indicate an apparent loss of speed while too little may permit development of fog.

DEVELOPER EXHAUSTION

The chemical reaction of development results in a depletion of certain constituents of the developing solution so that with continued use the developer becomes less efficient. This "exhaustion" of the developer is characterized by a loss in effective speed and gradation of the photographic emulsion (of importance in both film and paper development) and by a change in tone of the developed image (of special importance in making prints). In consequence of this condition, it is standard practice to use fresh developing solution whenever possible, as it is good insurance of obtaining uniformly optimum results with photographic films and papers.

There are, however, occasions when a rather large quantity of developer must be put in use, as in the tank development of films, and in such circumstances it becomes desirable, for reasons of economy, to prolong the usefulness of the developer by the addition of a "replenisher" solution which replaces solution carried away on developed films and helps restore the balance of active ingredients in the solution. For replenishers for Agfa formulas commonly used in tank development, see the formulas appended to Agfa 17, 17M, 47 and 48M.

By the occasional addition of such replenishers to maintain a constant volume of solution in the developing tank, the useful life of the developer can be prolonged three to four times without seriously degrading the quality of developed negatives. If large amounts of replenisher are to be added at any one time, the activity of the solution may be so increased that developing time will have to be shortened excessively, unless the replenisher is diluted somewhat with water.

Frequent requests are made for information on the exhaustion characteristics of a developer so that the user may have some idea of the amount of film or paper that may be safely processed. The accuracy of information given on this point depends largely on the three following factors which should be considered when interpreting data on exhaustion characteristics.

1. The rate of exhaustion is greatly influenced by the type of negatives or prints. When average density is high, exhaustion will be faster. When average density is low, exhaustion will occur more slowly.
2. The useful life of a developer is shortened by oxidation caused by contact with air. Exhaustion characteristics will, therefore, depend greatly on the age and manner in which the solution is used.
3. The degree of permissible exhaustion of paper developers is also dependent on the acceptable tolerance in variation of image tone of prints. Exhaustion figures cited below are based on what are normally considered acceptable prints, and may require modification if unusually critical standards of uniformity of image tone are established.

With appropriate regard given to the factors mentioned above, the following figures on developer exhaustion may be applied in practice. Agfa film developers 17, 17M, 47 and 48M can be safely used without replenishment for the development of 24 rolls of B2 size (or an equivalent amount of other size film) per gallon of developer if compensation in developing time is made as the solution is used. On the basis of a gallon of developing solution the increase in developing time amounts to approximately 10% for every four rolls of film processed—or more simply, 10% increase per roll per quart of developer. When used with their respective replenishers at the rate of $\frac{1}{2}$ to $\frac{3}{4}$ ounce or more of replenisher per roll of film, these developers may be used for approximately

200 B2 rolls per gallon of original developer without necessitating an increase in the original time of development. When adding replenisher, maintain original volume of developer discarding, if necessary, some used developer.

Agfa paper developers 103, 125 and 135 may be used satisfactorily without replenishment for the development of from 100 to 125 8 x 10-inch prints per gallon of working strength developer. This quantity assumes a change of tone within acceptable limits and a slight and progressive increase in exposure and developing time in order to maintain constant print quality throughout the life of the solution.

THE IMPORTANCE OF A SHORT STOP

As negatives or prints are removed from the developing solution, they carry with them considerable amounts of alkali and other chemicals which can contaminate the fixing bath and interfere with its action. Used-up developer carried along with negatives and prints can also cause troublesome stains if some method is not used to stop development instantly and completely. The best and most reliable way of doing this is the well-known short-stop bath of dilute acetic acid which neutralizes any alkali remaining on negatives or prints and prevents contamination of the fixing solution. Yet it is surprising how many photographers still try to get along without this intermediate bath between development and fixation. It is true that an acid fixing bath will give satisfactory results without the use of a preliminary short-stop bath, but its useful life is severely limited when a short-stop is not used.

Photographers frequently ask why acetic acid is used for the short-stop bath and fixing bath instead of other common acids like hydrochloric or sulphuric. The answer lies in the fact that a relatively large amount of acid must be available but the

solution must not be too strongly acid. Consequently a compound is used which is weak in acidity but which has available a high reserve of acid to neutralize alkali. A correspondingly larger amount of the weak acetic acid may therefore be used than could be used of a strong acid.

COMPOSITION AND FUNCTION OF THE FIXING BATH

The procedure of fixation is relatively simple but it should be carried out with considerable care as it can be the source of much trouble when improperly handled. The photographic film negative upon removal from the developing solution is still sensitive to light, as it contains undeveloped silver salt in the shadow portions of the image. To make the negative image permanent by removing this undeveloped silver salt, as well as to make it clear and transparent for printing, the action of the familiar fixing bath must be employed. The principal constituent of the fixing solution is sodium thiosulphate, more commonly known as "hypo" (from its older name of sodium hyposulphite), for in solution this useful chemical has the property of dissolving light-sensitive silver salts. The method by which the silver salt is removed is generally considered as, first, a conversion to a soluble double salt by the hypo, and second, the washing out of this soluble salt with water.

The conventional fixing solution generally contains other chemicals in addition to the hypo. Acetic acid is often included to aid in regulating the acidity of the fixing solution and to prevent stains. However, a hypo solution containing much acid is apt to precipitate sulphur, so another chemical, sodium sulphite, is added to prevent this unwanted reaction.

An additional component of the usual fixing bath is the hardening agent which prevents frilling and softening of the gelatin emulsion. White potassium alum

(potassium aluminum sulphate) is usually employed for this purpose though some photographers prefer potassium chrome alum used with a small amount of sulphuric acid. Care must be used with chrome alum as the hardener, however, as it rapidly loses its strength and is only truly effective when a fresh solution is used.

Fixing baths will seldom if ever give trouble when properly prepared from pure chemicals. If a bath turns milky after preparation, it indicates that sulphur is precipitating because of too much or too strong an acid, too little sulphite, too high a temperature of the solution, or improper mixing. A milky appearance of the bath during use is due to the presence of excess alkali and indicates that the bath should be replaced. It is important not to overwork the fixing bath, because a nearly exhausted fixing solution will not completely remove the silver salts, and prints or negatives may turn yellow or stain on aging. A gallon of standard strength fixing bath should fix 100 8 x 10" double-weight prints or their equivalent. Between 100 and 120 rolls of B2 film (or equivalent) may be fixed in one gallon of standard-strength fixing bath if the films have previously been rinsed in a short-stop bath or plain water. When the bath froths or foams, it should be replaced. Many photographers have found a convenient, certain and economical method of insuring complete fixation lies in the use of two fixing solutions. Fixing is carried out first in the more used of the two baths and finally in the fresher solution. When the older bath becomes exhausted, the partly used solution takes its place and a fresh fixing bath is prepared for the second solution.

SUGGESTIONS FOR TROUBLE-FREE MIXING

The first and perhaps most important point to follow in the preparation of solutions is that of using chemicals which are

"photographically pure". Cheap commercial grades of every chemical used in photographic processes can be obtained, but many of them contain impurities which are detrimental to perfect results. Chemicals which are marked "C.P." (Chemically Pure) and those which are marketed for photographic purposes by reliable manufacturers are always safe to use, and can be depended upon. Chemicals marked U.S.P. may be suitable if the amount of impurity present is known to be insignificant. This can be determined by looking up the U.S.P. standards for the chemical in question by consulting the edition of the United States Pharmacopia, tenth edition (1925) or eleventh edition (1935) as indicated by the number X or XI which follows the U.S.P. on the chemical container label.

The second most important rule for trouble-free solutions is perhaps that of mixing all components of a solution in the order listed in the formula. This is extremely important and lack of attention to this point can easily result in the formation of precipitates which will not dissolve in the solution. A worth while corollary to this rule is to wait until each chemical is thoroughly dissolved before adding the next component of the solution. In most single-solution developers the preservative sodium sulphite is usually added immediately after the developing agent but before the hydroquinone if this chemical is used. When two developing agents such as metol and hydroquinone are used, the addition is generally made in the order metol, sulphite, hydroquinone. However, with developing agents like glycine, the sulphite and carbonate are dissolved first, as the glycine dissolves with greater difficulty otherwise.

A third important rule for any photographer is to use the purest water obtainable. Innumerable troubles in developing and fixing have been traced to impurities present in the water. Many photographers find it a wise decision to use distilled water

for all stock solutions, adding tap water for dilution.

The time required for the preparation of processing solutions can be reduced materially by the use of hot water (about 125° F.) as most chemicals dissolve more rapidly in hot than in cold water. A convenient method of preparing one quart of developer, for instance, is to start with about 24-28 ounces of hot water (125° F.) and after the addition of all chemicals, to add sufficient cold water to bring the total volume up to 32 ounces.

Another point well worth remembering is that of weighing and measuring all quantities as closely as possible. Particular care should be taken to avoid errors in small quantities, as a ten-grain error is obviously a very serious one on a fifty-grain quantity, while on a half-pound quantity it might not have harmful effects.

Finally and no less important for the order in which it is mentioned, is the matter of temperature. The need for uniform regulation of temperature cannot be over-emphasized. While it has in the past been accepted practice to develop film at 65° F. and paper at 70° F., practical considerations have resulted in the recommendation of 68° F. for both film and paper development. Accordingly, all developing times listed in this book have been revised to conform with this standard of 68° F.

COMPENSATION OF NON-STANDARD TEMPERATURES

While best results are obtained when film development is carried out at 68° F., there are, of course, certain occasions when surrounding conditions are such that it is impossible to maintain solutions at this temperature. In instances when the temperature is not higher than 75° F. or lower than 60° F., development can be carried out with care if the developing time is modified to keep the contrast of the developed film negative within a desired

range. The following table of Time-Temperature Coefficients indicates the percentage correction in developing time for a number of popular Agfa formulas. If, for example, it were necessary to use Agfa 17 at 75° F., with a film normally requiring 12 minutes development at 68° F., the developing time would be reduced 35% to approximately 8 minutes in order to keep contrast within the desired range. Of course, care must be taken in handling wet photographic film at the higher temperatures, as the gelatin emulsion is then more susceptible to scratches and other physical damage.

TIME-TEMPERATURE COEFFICIENTS

Developer	Percentage Change from Developing Time Used at 68° F.	
	60° F.	75° F.
Agfa 17.....	+65%	-35%
Agfa 17M.....	+65%	-35%
Agfa 20.....	+85%	-35%
Agfa 30.....	+85%	-35%
Agfa 45.....	+50%	-30%
Agfa 47.....	+65%	-35%
Agfa 48M.....	+65%	-35%
Agfa 64.....	+75%	-25%

When development is necessary at temperatures above 75° F. the use of a chemical, such as sodium sulphate, which acts as a "swelling suppressor" is advisable. For development at 80° F., 100 to 150 grams (3½ to 5 ounces) of sodium sulphate crystals* should be added to each liter (quart) of developer and short-stop so that protection against excessive swelling will be afforded until films have been hardened in the fixing bath. Development time at 80° F. with the proper amount of sodium sulphate added will be approximately 30% less than the normal development time at 68° F. If temperature falls below that for

which sodium sulphate addition is made, developing time may have to be lengthened 30 to 50% to compensate for loss in developing action.

Due to the rapid oxidation of pyro at high temperatures Agfa 45 should not be used at temperatures above 75° F.

Another method of minimizing the chance of physical damage caused by processing at high temperatures is the use of a hardening short-stop bath, such as Agfa 216, directly after development. In summation, these methods of high-temperature processing should not be considered as preferred developing technique but merely as the best expedient when processing solutions cannot be maintained at 68° F.

AGITATION

Developing times listed with formulas shown on later pages of this booklet, as well as the time-temperature compensation methods previously described, are based on effective agitation of the film in the developing solution. Effective agitation can be considered to be any method which provides a continual flow of solution across the surface of the film, but for practical considerations an *intermittent* form of agitation can be employed which will adequately remove development by-products and supply fresh developing solution to the film emulsion. Such a method requires actual movement of the film in the developer, or developer over the film for 5 seconds out of every minute, and can be achieved by rocking the tray in tray development, or by agitation of the film in the solution when tank development is employed. The important point is that a repeatable method of getting effective agitation should be established if uniformly excellent results are to be obtained in film development.

*If anhydrous sodium sulphate is employed use ½ the amount specified.

DEVELOPING FORMULAS

AGFA 17

FINE-GRAIN BORAX TANK DEVELOPER

In addition to its usefulness as a fine-grain developer, this formula is satisfactory for obtaining soft gradation with Agfa Direct Copy Film, Agfa Direct Duplicating Film and Agfa portrait and press films. It is also recommended for motion picture negative development. This soft-working, fine-grain developer may be obtained in packaged form ready-to-use by ordering "Agfa 17 Fine-Grain Developer."

	Metric		Avoirdupois	
Hot Water (125° F. or 52° C.)	750	cc.	24	ounces 3 quarts
Agfa Metol	1.5	grams	22	grains 88 grains
Agfa Sodium Sulphite, anhydrous	80	grams	2½ oz. 80 gr.	10¼ ounces
Agfa Hydroquinone	3	grams	45	grains ¼ oz. 70 gr.
Borax	3	grams	45	grains ¼ oz. 70 gr.
Agfa Potassium Bromide	.5	gram	7.5	grains 30 grains
Water to make	1	liter	32	ounces 1 gallon

Do not dilute for use.

Tank Development time at 68° F. (20° C.), 10 to 15 minutes for fine-grain films, 12 to 20 minutes for Direct Copy, Direct Duplicating, and portrait sheet films.

Tray Development time at 68° F. (20° C.), 8 to 12 minutes depending on film type and density desired.

AGFA 17A REPLENISHER

Add ¼ to ¾ ounce of replenisher to Agfa 17 for each roll of B2 film or 36-exposure 35mm. film (or equivalent) developed. Maintain original volume of developer, discarding if necessary some used developer. No increase in original developing time is necessary when replenisher is used in this manner. Available in packaged form by ordering "Agfa 17A Replenisher."

	Metric		Avoirdupois	
Hot Water (125° F. or 52° C.)	750	cc.	24	ounces 3 quarts
Agfa Metol	2.2	grams	32	grains ¼ oz. 20 gr.
Agfa Sodium Sulphite, anhydrous	80	grams	2½ oz. 80 gr.	10¼ ounces
Agfa Hydroquinone	4.5	grams	65	grains ½ oz. 50 gr.
Borax	18	grams	½ oz. 44 gr.	2¼ oz. 75 gr.
Water to make	1	liter	32	ounces 1 gallon

AGFA 17M

FINE-GRAIN METABORATE TANK DEVELOPER

This developer is recommended for those who desire a formula similar to Agfa 17, but permitting greater variation in developing time.

	Metric		Avoirdupois	
Hot Water (125° F. or 52° C.)	750	cc.	24	ounces 3 quarts
Agfa Metol	1.5	grams	22	grains 88 grains
Agfa Sodium Sulphite, anhydrous	80	grams	2½ oz. 80 gr.	10¼ ounces
Agfa Hydroquinone	3	grams	45	grains ¼ oz. 70 gr.
Agfa Sodium Metaborate	2	grams	30	grains ¼ oz. 10 gr.
Agfa Potassium Bromide	.5	gram	7½	grains 30 grains
Water to make	1	liter	32	ounces 1 gallon

Do not dilute for use.

Development time at 68° F. (20° C.), 10 to 15 minutes for fine-grain films.

Larger amounts of Metaborate may be used with corresponding reduction of developing time (up to 10 grams of Metaborate per liter with a developing time of 5 minutes at 68°) although slightly coarser grain size will then be experienced.

AGFA 17M REPLENISHER

Add $\frac{1}{2}$ to $\frac{3}{4}$ ounce of replenisher to Agfa 17M for each roll of B2 film or 36-exposure 35mm. film (or equivalent) developed. Maintain original volume of developer, discarding if necessary some used developer. No increase in original developing time is necessary when replenisher is used in this manner.

	<i>Metric</i>	<i>Avoirdupois</i>	
Hot Water (125° F. or 52° C.).....	750 cc.	24 ounces	3 quarts
Agfa Metol.....	2.2 grams	32 grains	$\frac{1}{4}$ oz. 20 gr.
Agfa Sodium Sulphite, anhydrous.....	80 grams	$2\frac{1}{2}$ oz. 80 gr.	$10\frac{1}{4}$ ounces
Agfa Hydroquinone.....	4.5 grams	65 grains	$\frac{1}{2}$ oz. 50 gr.
Agfa Sodium Metaborate.....	8 grams	$\frac{1}{4}$ oz. 10 gr.	1 oz. 40 gr.
Water to make.....	1 liter	1 quart	1 gallon

AGFA 20

M-H POSITIVE DEVELOPER

This clean-working developer is recommended for normal contrast with tray or tank development of positive film.

	<i>Metric</i>	<i>Avoirdupois</i>	
Hot Water (125° F. or 52° C.).....	750 cc.	24 ounces	3 quarts
Agfa Metol.....	2 grams	30 grains	$\frac{1}{4}$ oz. 10 gr.
Agfa Sodium Sulphite, anhydrous.....	25 grams	$\frac{3}{4}$ oz. 40 gr.	$3\frac{3}{4}$ oz. 40 gr.
Agfa Hydroquinone.....	4 grams	60 grains	$\frac{1}{2}$ oz. 20 gr.
Agfa Sodium Carbonate, monohydrated.....	18.5 grams	$\frac{1}{2}$ oz. 50 gr.	$2\frac{1}{2}$ ounces
Agfa Potassium Bromide.....	2 grams	30 grains	$\frac{1}{4}$ oz. 10 gr.
Water to make.....	1 liter	32 ounces	1 gallon

Do not dilute for use. Normal developing time 3 to 4 minutes at 68° F. (20° C.).

AGFA 22

M-H TITLE DEVELOPER

This formula is recommended for tray or tank development of cine title film and positive film to obtain results of high contrast.

	<i>Metric</i>	<i>Avoirdupois</i>	
Hot Water (125° F. or 52° C.).....	750 cc.	24 ounces	3 quarts
Agfa Metol.....	.8 gram	12 grains	52 grains
Agfa Sodium Sulphite, anhydrous.....	40 grams	$1\frac{1}{4}$ ounces	5 ounces
Agfa Hydroquinone.....	8 grams	$\frac{1}{4}$ oz. 10 gr.	1 oz. 40 gr.
Agfa Sodium Carbonate, monohydrated.....	50 grams	$1\frac{3}{4}$ ounces	7 ounces
Agfa Potassium Bromide.....	5 grams	75 grains	$\frac{1}{2}$ oz. 80 gr.
Water to make.....	1 liter	32 ounces	1 gallon

Do not dilute for use. Normal developing time 5 to 8 minutes at 68° F. (20° C.).

DEVELOPING FORMULAS

AGFA 30 X-RAY DEVELOPER

This developer is recommended for use with Agfa X-Ray Film and for use with Agfa Direct Copy Film and Direct Duplicating Film when results of maximum brilliance are desired. Agfa 30 is also suitable for Agfa aerial films as it is clean-working, has long life and gives high contrast.

	Metric		Avoirdupois
Hot Water (125° F. or 52° C.)	750 cc.	24 ounces	3 quarts
Agfa Metol	3.5 grams	50 grains	1/4 oz. 95 gr.
Agfa Sodium Sulphite, anhydrous	60 grams	2 ounces	8 ounces
Agfa Hydroquinone	9 grams	1/4 oz. 20 gr.	1 oz. 80 gr.
Agfa Sodium Carbonate, monohydrated	40 grams	1 1/4 oz. 40 gr.	5 1/4 ounces
Agfa Potassium Bromide	2 grams	30 grains	1/4 oz. 10 gr.
Water to make	1 liter	32 ounces	1 gallon

Do not dilute for use.

Normal development time at 68° F. (20° C.), for X-Ray Film, 6 minutes, for Non-Screen X-Ray Film, 8 minutes, for Direct Copy Film and Direct Duplicating Film, 4 to 5 minutes, for Agfa aerial films 10-15 minutes depending upon the type of developing machine.

AGFA 40 M-H TRAY DEVELOPER

This is a brilliant Metol-Hydroquinone tray developer for roll, pack and sheet film.

Stock Solution

	Metric		Avoirdupois
Hot Water (125° F. or 52° C.)	900 cc.	29 ounces	3 1/2 quarts
Agfa Metol	4.5 grams	66 grains	1/2 oz. 45 gr.
Agfa Sodium Sulphite, anhydrous	54 grams	1 3/4 oz. 25 gr.	7 1/4 ounces
Agfa Hydroquinone	7.5 grams	1/4 ounce	1 ounce
Agfa Sodium Carbonate, monohydrated	54 grams	1 3/4 oz. 25 gr.	7 1/4 ounces
Agfa Potassium Bromide	3 grams	45 grains	1/4 oz. 80 gr.
Water to make	1 liter	32 ounces	1 gallon

For use dilute 1 part stock solution with 2 parts water.

Development time 4 to 5 minutes at 68° F. (20° C.).

AGFA 42 M-H TANK DEVELOPER

This is a soft-working tank formula recommended for pack, roll and portrait films.

	Metric		Avoirdupois
Hot Water (125° F. or 52° C.)	750 cc.	24 ounces	3 quarts
Agfa Metol	.8 gram	12 grains	47 grains
Agfa Sodium Sulphite, anhydrous	45 grams	1 1/2 ounces	6 ounces
Agfa Hydroquinone	1.2 grams	18 grains	70 grains
Agfa Sodium Carbonate, monohydrated	8 grams	1/4 oz. 10 gr.	1 oz. 40 gr.
Agfa Potassium Metabisulphite	4 grams	59 grains	1/2 oz. 20 gr.
Agfa Potassium Bromide	1.5 grams	22 grains	88 grains
Water to make	1 liter	32 ounces	1 gallon

Do not dilute for use.

Develop 15 to 20 minutes at 68° F. (20° C.).

AGFA 45 PYRO DEVELOPER

This formula is recommended to those who prefer Pyro development. Stock solutions should be kept in stoppered bottles.

<i>Solution 1</i>			
	<i>Metric</i>	<i>Avoirdupois</i>	
Agfa Sodium Bisulphite.....	9.8 grams	¼ oz. 35 gr.	1¼ oz. 25 gr.
Agfa Pyro.....	60 grams	2 ounces	8 ounces
Agfa Potassium Bromide.....	1.1 grams	16 grains	64 grains
Water to make.....	1 liter	32 ounces	1 gallon

<i>Solution 2</i>			
Agfa Sodium Sulphite, anhydrous.....	105 grams	3½ ounces	14 ounces
Water to make.....	1 liter	32 ounces	1 gallon

<i>Solution 3</i>			
Agfa Sodium Carbonate, monohydrated.....	85 grams	2¾ ounces	11 ounces
Water to make.....	1 liter	32 ounces	1 gallon

TANK DEVELOPMENT: Take one part each Solutions 1, 2, 3 and add 11 parts water. Normal development time, from 9 to 12 minutes at 68° F. (20° C.). **TRAY DEVELOPMENT:** Take 1 part each Solutions 1, 2, 3 and add 7 parts water. Normal development time, from 6 to 8 minutes at 68° F. (20° C.). Solutions will keep well when stored separately but final developer should be used immediately after mixing.

AGFA 47 METOL HYDROQUINONE DEVELOPER

This is a long-life, clean-working formula which will give excellent results as a standard film developer for either tray or tank development. Available in packaged form by ordering Agfa 47 developer.

	<i>Metric</i>	<i>Avoirdupois</i>	
Hot Water (125° F. or 52° C.).....	750 cc.	3 quarts	2½ gallons
Agfa Metol.....	1.5 grams 6	88 grains	½ oz. 90 gr.
Agfa Sodium Sulphite, anhydrous.....	45 grams 80	6 ounces	1 lb. 5 oz.
Agfa Sodium Bisulphite.....	1 gram 60	60 grains	½ ounce
Agfa Hydroquinone.....	3 grams 12	¼ oz. 70 gr.	1¼ oz. 80 gr.
Agfa Sodium Carbonate, monohydrated.....	6 grams 24	¾ oz. 20 gr.	2½ ounces
Agfa Potassium Bromide.....	.8 gram 47	47 grains	¾ oz. 50 gr.
Water to make.....	1 liter 1	1 gallon	3½ gallons

Do not dilute for use.*

TANK DEVELOPMENT: Normal development time, 6 to 8 minutes at 68° F. (20° C.) with occasional agitation. **TRAY DEVELOPMENT:** Normal development time 5 to 7 minutes at 68° F. (20° C.).

*For longer developing times with tank development, dilute one part developing solution with one part water and develop 12 to 16 minutes at 68° F. (20° C.).

DEVELOPING FORMULAS

AGFA 47A REPLENISHER

Add $\frac{1}{2}$ to $\frac{3}{4}$ ounce of replenisher to Agfa 47 for each roll of B2 film (or equivalent) developed. Maintain original volume of developer, discarding if necessary some used developer. No increase in original developing time is necessary when replenisher is used in this manner. Available in packaged form by ordering Agfa 47A Replenisher.

	<i>Metric</i>	<i>Avoirdupois</i>	
Hot Water (125° F. or 52° C.)	750 cc.	24 ounces	3 quarts
Agfa Metol	3 grams	45 grains	$\frac{1}{4}$ oz. 70 gr.
Agfa Sodium Sulphite, anhydrous	45 grams	1 $\frac{1}{2}$ ounces	6 ounces
Agfa Sodium Bisulphite	2 grams	30 grains	$\frac{1}{4}$ oz. 10 gr.
Agfa Hydroquinone	6 grams	88 grains	$\frac{3}{4}$ oz. 20 gr.
Agfa Sodium Carbonate, monohydrated	12 grams	$\frac{1}{4}$ oz. 65 gr.	1 $\frac{1}{2}$ oz. 50 gr.
Water to make	1 liter	32 ounces	1 gallon

AGFA 48M METABORATE DEVELOPER

This formula is recommended for Photofinishing, Professional, and Amateur developing and is suitable for deep tank use over a long period of time.

	<i>Metric</i>	<i>Avoirdupois</i>	
Hot Water (125° F. or 52° C.)	750 cc.	3 quarts	2 $\frac{1}{2}$ gallons
Agfa Metol	2 grams	$\frac{1}{4}$ oz. 10 gr.	$\frac{3}{4}$ oz. 90 gr.
Agfa Sodium Sulphite, anhydrous	40 grams	5 $\frac{1}{4}$ ounces	1 lb. 2 $\frac{1}{4}$ oz.
Agfa Hydroquinone	1.5 grams	88 grains	$\frac{1}{2}$ oz. 90 gr.
Agfa Sodium Metaborate	10 grams	1 $\frac{1}{4}$ oz. 30 gr.	4 $\frac{1}{2}$ ounces
Agfa Potassium Bromide	.5 gram	30 grains	$\frac{1}{4}$ ounce
Water to make	1 liter	1 gallon	3 $\frac{1}{2}$ gallons

Do not dilute for use.

TANK DEVELOPMENT: Normal developing time 5 to 7 minutes at 68° F. (20° C.).

TRAY DEVELOPMENT: Normal developing time 4 to 6 minutes at 68° F. (20° C.).

These developing times apply to Agfa portrait, press and commercial films and to all Agfa roll and pack films except Finopan which should be developed 20 to 30 per cent less.

AGFA 48M REPLENISHER

Add $\frac{1}{2}$ to $\frac{3}{4}$ ounce of replenisher to Agfa 48M for each roll of B2 film (or equivalent) developed. Maintain original volume of developer, discarding if necessary some used developer. No increase in original developing time is necessary when replenisher is used in this manner.

	<i>Metric</i>	<i>Avoirdupois</i>	
Hot Water (125° F. or 52° C.)	750 cc.	24 ounces	3 quarts
Agfa Metol	6.3 grams	90 grains	$\frac{3}{4}$ oz. 30 gr.
Agfa Sodium Sulphite, anhydrous	30 grams	1 ounce	4 ounces
Agfa Hydroquinone	10 grams	$\frac{1}{4}$ oz. 35 gr.	1 $\frac{1}{4}$ ounces
Agfa Sodium Metaborate	40 grams	1 $\frac{1}{4}$ ounces	5 ounces
Water to make	1 liter	1 quart	1 gallon

AGFA 61

M-H TRAY DEVELOPER

This developer is recommended for use with commercial film to produce negatives of normal contrast. It may also be used satisfactorily for roll, pack and sheet film for negatives of average brilliance.

	<i>Metric</i>		<i>Avoirdupois</i>	
Hot Water (125° F. or 52° C.).....	750	cc.	24 ounces	3 quarts
Agfa Metol.....	1	gram	15 grains	60 grains
Agfa Sodium Sulphite, anhydrous.....	15	grams	$\frac{1}{2}$ ounce	2 ounces
Agfa Hydroquinone.....	2	grams	30 grains	$\frac{1}{4}$ oz. 10 gr.
Agfa Sodium Carbonate, monohydrated.....	15	grams	$\frac{1}{2}$ ounce	2 ounces
Agfa Potassium Bromide.....	1	gram	15 grains	60 grains
Water to make.....	1	liter	32 ounces	1 gallon

Do not dilute for use. Normal development time, 4 to 6 minutes at 68° F. (20° C.).

AGFA 64

RAPID M-H (TROPICAL) DEVELOPER

This is a clean-working developer of particular value for rapid development or development at high temperatures.

	<i>Metric</i>		<i>Avoirdupois</i>	
Hot Water (125° F. or 52° C.).....	750	cc.	24 ounces	3 quarts
Agfa Metol.....	2.5	grams	36 grains	$\frac{1}{4}$ oz. 35 gr.
Agfa Sodium Sulphite, anhydrous.....	25	grams	$\frac{3}{4}$ oz. 40 gr.	$3\frac{1}{4}$ oz. 40 gr.
Agfa Hydroquinone.....	6.5	grams	95 grains	$\frac{3}{4}$ oz. 55 gr.
Agfa Sodium Carbonate, monohydrated.....	16	grams	$\frac{1}{2}$ oz. 15 gr.	2 oz. 60 gr.
Agfa Potassium Bromide.....	1	gram	15 grains	60 grains
Water to make.....	1	liter	32 ounces	1 gallon

Do not dilute for use.

Normal development time—3 to 4 minutes at 68° F. (20° C.).

2 to 3 minutes at 85° F. (29° C.).

AGFA 70

HYDROQUINONE CAUSTIC DEVELOPER

This developer is recommended for Process film used in reproduction work.

Solution 1

	Metric		Avoirdupois
Hot Water (125° F. or 52° C.).....	750 cc.	24 ounces	3 quarts
Agfa Hydroquinone.....	25 grams	¾ oz. 40 gr.	¾ oz. 40 gr.
Agfa Potassium Metabisulphite.....	25 grams	¾ oz. 40 gr.	¾ oz. 40 gr.
Agfa Potassium Bromide.....	25 grams	¾ oz. 40 gr.	¾ oz. 40 gr.
Cold Water.....	1 liter	32 ounces	1 gallon

Solution 2

Cold Water.....	1 liter	32 ounces	1 gallon
*Agfa Sodium Hydroxide (Caustic Soda Flakes).....	36 grams	1 oz. 90 gr.	¾ oz. 30 gr.

Mix equal parts of Solutions 1 and 2 immediately before use.

Develop films within 3 minutes at 68° F. (20° C.).

*May be substituted by:

Potassium Hydroxide.....	50 grams	1½ oz. 80 gr.	6¼ ounces
--------------------------	----------	---------------	-----------

AGFA 72

GLYCIN DEVELOPER

This formula is recommended for use with commercial films in reproduction work and is also suitable for development of roll, pack and sheet film.

Stock Solution

	Metric		Avoirdupois
Hot Water (125° F. or 52° C.).....	800 cc.	25 ounces	3 quarts
Agfa Sodium Sulphite, anhydrous.....	125 grams	4¼ ounces	1 lb. 1 oz.
Agfa Potassium Carbonate.....	250 grams	8½ ounces	2 lb. 2 oz.
Agfa Glycin.....	50 grams	1½ oz. 80 gr.	6¼ ounces
Water to make.....	1 liter	32 ounces	1 gallon

TANK DEVELOPMENT: Take one part stock solution, fifteen parts water and develop 20 to 25 minutes at 68° F. (20° C.). TRAY DEVELOPMENT: Take one part stock solution, four parts water and develop 5 to 10 minutes at 68° F. (20° C.).

AGFA 73

HIGH CONTRAST M-H TRAY DEVELOPER

This formula is recommended for development of process, commercial and similar films when extremely high contrast is desired. See footnote under Agfa 90 on page 16 for formula.

AGFA 79

PARAFORMALDEHYDE DEVELOPER

This is a standard formula recommended for development of Reprolith and Reprolith Ortho Films. Agfa 79 may be obtained in packaged form ready-to-use by ordering "PARALITH DEVELOPER."

	<i>Metric</i>	<i>Avoirdupois</i>
Water (Not over 90° F. or 32° C.).....	2000 cc.	64 ounces
Agfa Sodium Sulphite, anhydrous.....	120 grams	4 ounces
Paraformaldehyde.....	30 grams	1 ounce
Agfa Potassium Metabisulphite.....	10.5 grams	150 grains
Agfa Boric Acid Crystals.....	30 grams	1 ounce
Agfa Hydroquinone.....	90 grams	3 ounces
Agfa Potassium Bromide.....	6 grams	90 grains
Water to make.....	4 liters	1 gallon

Dissolve chemicals in the order given and use solution full strength. Normal development time 2 to 3 minutes at 68° to 70° F. (20 to 21° C.). For Reprolith Orthochromatic, develop 1½ to 3 minutes at same temperature.

AGFA 81

REPROLITH DEVELOPER

This formula may be obtained in packaged form by specifying "Reproolith Developer." Formula 81 provides a single-solution developer of excellent keeping quality for the development of Reprolith Film.

	<i>Metric</i>	<i>Avoirdupois</i>
Hot water (125° F. or 52° C.).....	750 cc.	24 ounces 3 quarts
Agfa Hydroquinone.....	35 grams	1 oz. 70 gr. 4½ ounces
Agfa Sodium Sulphite, anhydrous.....	55 grams	1¾ ounces 7¼ ounces
Agfa Sodium Carbonate, monohydrated.....	80 grams	2¾ ounces 10½ ounces
Agfa Citric Acid.....	5.5 grams	80 grains ¾ ounce
Agfa Potassium Bromide.....	10 grams	¾ oz. 35 gr. 1¼ ounces
Water to make.....	1 liter	32 ounces 1 gallon

Do not dilute for use. Normal development time within 3 minutes at 68° F. (20° C.).

DEVELOPING FORMULAS

AGFA 90 HIGH CONTRAST M-H TRAY DEVELOPER

This developer has been particularly designed for use with Commercial and Process films* to produce negatives of brilliant contrast.

	<i>Metric</i>		<i>Avoirdupois</i>	
Hot Water (125° F. or 52° C.)	750	cc.	24 ounces	3 quarts
Agfa Metol	5	grams	75 grains	1/4 oz. 75 gr.
Agfa Sodium Sulphite, anhydrous	40	grams	1 1/4 oz. 40 gr.	5 1/4 ounces
Agfa Hydroquinone	6	grams	88 grains	3/4 oz. 20 gr.
Agfa Sodium Carbonate, monohydrated	40	grams	1 1/4 oz. 40 gr.	5 1/4 ounces
Agfa Potassium Bromide	3	grams	45 grains	3/4 oz. 70 gr.
Water to make	1	liter	32 ounces	1 gallon

Do not dilute for use.

Normal development time, 4 to 6 minutes at 68° F. (20° C.).

*For results of higher contrast, this developer may be adapted to give Agfa 73 formula by the addition of three grams of Potassium Bromide per liter of developer (45 grains per 32 oz.), with developing time of 2 to 3 minutes at 68° F. (20° C.).

AGFA 103 PAPER DEVELOPER

This formula is recommended as a developer for Convira, Speedex and Brovira papers when cold, blue-black tones are desired. It may be had in packaged form by ordering Agfa 103 Developer.

*Stock Solution**

	<i>Metric</i>		<i>Avoirdupois</i>	
Hot Water (125° F. or 52° C.)	750	cc.	24 ounces	3 quarts
Agfa Metol	3.5	grams	50 grains	1/4 oz. 95 gr.
Agfa Sodium Sulphite, anhydrous	45	grams*	1 1/2 ounces*	6 ounces*
Agfa Hydroquinone	11.5	grams	3/4 oz. 55 gr.	1 1/2 ounces
Agfa Sodium Carbonate, monohydrated	78	grams	2 1/2 oz. 35 gr.	10 1/2 ounces
Agfa Potassium Bromide	1.2	grams	18 grains	72 grains
Water to make	1	liter	32 ounces	1 gallon

PAPER DEVELOPMENT: Dilute 1 part stock solution with 2 parts water. For Brovira and similar bromide papers, develop 1 to 1 1/2 minutes at 68° F. (20° C.). For Speedex and Convira normal development time is 45 seconds. Other contact papers may require 1 to 1 1/2 minutes.

For slower, softer development of Brovira dilute 1 to 4. Develop 1 1/2 to 3 minutes, at 68° F. (20° C.).

*Revised form.

AGFA 110**DIRECT BROWN-BLACK PAPER DEVELOPER**

Beautiful warm tones may be obtained with this developer on both contact and projection papers.

Stock Solution

	<i>Metric</i>	<i>Avoirdupois</i>	
Hot Water (125° F. or 52° C.).....	750 cc.	24 ounces	3 quarts
Agfa Hydroquinone.....	22.5 grams	¾ ounce	3 ounces
Agfa Sodium Sulphite, anhydrous.....	57 grams	1¾ oz. 50 gr.	7½ ounces
Agfa Sodium Carbonate, monohydrated.....	75 grams	2½ ounces	10 ounces
Agfa Potassium Bromide.....	2.75 grams	40 grains	¼ oz. 50 gr.
Water to make.....	1 liter	32 ounces	1 gallon

For use dilute 1 part stock solution with 5 parts water.

Give prints 3 to 4 times normal exposure and develop 5 to 7 minutes at 68° F. (20° C.).

AGFA 113**AMIDOL PAPER DEVELOPER**

This formula is intended for tray development only and must be mixed fresh each time. It is recommended only for small lots of prints.

	<i>Metric</i>	<i>Avoirdupois</i>
Agfa Amidol.....	6.6 grams	96 grains
Agfa Sodium Sulphite, anhydrous.....	44 grams	1½ ounces
Agfa Potassium Bromide.....	.55 gram	8 grains
Water to make.....	1 liter	32 ounces

Do not dilute for use. If hot water is used for dissolving chemicals, the sodium sulphite and potassium bromide should be dissolved first and the amidol added only after the solution has cooled.

For development of Cykora and similar papers use twice the amount of Potassium Bromide specified above.

Develop 1 to 2 minutes at 68° F. (20° C.).

AGFA 115

GLYCIN-HYDROQUINONE DEVELOPER

This is a warm-tone developer suitable for Cykon, Cykora, Indiatone, Brovira, and similar papers.

Stock Solution

	Metric		Avoirdupois	
Hot Water (125° F. or 52° C.)	750	cc.	24 ounces	3 quarts
Agfa Sodium Sulphite, anhydrous	90	grams	3 ounces	12 ounces
Agfa Sodium Carbonate, monohydrated	150	grams	5 ounces	1 lb. 4 oz.
Agfa Glycin	30	grams	1 ounce	4 ounces
Agfa Hydroquinone	9.5	grams	¼ oz. 30 gr.	1¼ oz. 10 gr.
Agfa Potassium Bromide	4	grams	60 grains	½ oz. 20 gr.
Water to make	1	liter	32 ounces	1 gallon

For warm tones, dilute 1 part stock solution with 3 parts water and develop prints 2½ to 3 minutes at 68° F. (20° C.).

For very warm tones and more open shadows, especially with Cykora, dilute 1 part stock solution with 6 parts water, giving prints 3 to 4 times normal exposure and 2½ to 5 minutes development. Because of dilution of the developer, solution will exhaust more rapidly and will require more frequent replacement.

AGFA 120

SOFT-WORKING PAPER DEVELOPER

This is a soft-working developer, primarily intended for portrait work where soft gradation is required.

Stock Solution

	Metric		Avoirdupois	
Hot Water (125° F. or 52° C.)	750	cc.	24 ounces	3 quarts
Agfa Metol	12.3	grams	¼ oz. 70 gr.	1½ oz. 60 gr.
Agfa Sodium Sulphite, anhydrous	36	grams	1 oz. 88 gr.	4¼ ounces
Agfa Sodium Carbonate, monohydrated	36	grams	1 oz. 88 gr.	4¼ ounces
Agfa Potassium Bromide	1.8	grams	27 grains	¼ ounce
Water to make	1	liter	32 ounces	1 gallon

For use, dilute 1 part stock solution with 2 parts water.

Normal developing time, 1½ to 3 minutes at 68° F. (20° C.).

TWO-TRAY PRINT DEVELOPMENT

While the majority of photographic prints can be prepared most conveniently by development in a single solution, some occasions are often met in which the critical nature of the subject requires a degree of control over contrast that is not normally available. In such instances the two-tray print development procedure can be employed to good advantage, for it permits a nicety of control over print gradation that cannot be obtained by usual variations of exposure and developing time.

The two-tray procedure involves the use of two separate developing solutions, usually a soft-working formula, such as Agfa 120, and a brilliant-working developer, like Agfa 130—though some workers prefer the combination of Agfa 120 and 125. Development is begun in one solution and completed in the other, the first developer used having the greater effect. This procedure is particularly helpful in producing full-scale prints which exhibit well modulated gradation in both highlight and shadow.

AGFA 125

PAPER AND FILM DEVELOPER

This formula is recommended for development of Cykon, Cykora, Brovira, Convira, Indiatone and similar papers. It can also be used for development of roll, pack and sheet film when brilliant negatives are desired. It may be obtained in packaged form by ordering Agfa 125 Developer.

Stock Solution

	Metric		Avoirdupois	
Hot Water (125° F. or 52° C.)	750	cc.	24 ounces	3 quarts
Agfa Metol	3	grams	45 grains	¼ oz. 70 gr.
Agfa Sodium Sulphite, anhydrous	44	grams	1½ ounces	6 ounces
Agfa Hydroquinone	12	grams	¼ oz. 60 gr.	1½ oz. 20 gr.
Agfa Sodium Carbonate, monohydrated	65	grams	2¼ ounces	9 ounces
Agfa Potassium Bromide	2	grams	30 grains	¼ oz. 10 gr.
Water to make	1	liter	32 ounces	1 gallon

PAPER DEVELOPMENT: Dilute 1 part stock solution with 2 parts water. Develop 1 to 2 minutes at 68° F. (20° C.). For softer and slower development dilute 1 to 4, and develop 1½ to 3 minutes at 68° F. (20° C.). For greater brilliance, shorten the exposure slightly and lengthen the development time. For greater softness, lengthen the exposure slightly and shorten the development time.

FILM DEVELOPMENT: Dilute 1 part stock solution with 1 part water and develop 3 to 5 minutes at 68° F. (20° C.). For softer results, dilute 1 to 3 and develop 3 to 5 minutes at 68° F. (20° C.).

AGFA 130 UNIVERSAL PAPER DEVELOPER

This formula is a universal developer for all projection and contact papers. It gives rich black tones with excellent brilliance and detail. Agfa 130 provides unusual latitude in development and is clean-working even with long developing times.

	<i>Stock Solution</i>			
	<i>Metric</i>		<i>Avoirdupois</i>	
Hot Water (125° F. or 52° C.).....	750 cc.	24 ounces	3 quarts	
Agfa Metol.....	2.2 grams	32 grains	¼ oz. 20 gr.	
Agfa Sodium Sulphite, anhydrous.....	50 grams	1¾ ounces	6¾ ounces	
Agfa Hydroquinone.....	11 grams	¾ oz. 50 gr.	1½ ounces	
Agfa Sodium Carbonate, monohydrated.....	78 grams	2½ ounces	10½ ounces	
Agfa Potassium Bromide.....	5.5 grams	80 grains	¾ ounce	
Agfa Glycin.....	11 grams	¾ oz. 50 gr.	1½ ounces	
Water to make.....	1 liter	32 ounces	1 gallon	

The prepared stock solution is clear but slightly colored. The coloration in this case does not indicate the developer has deteriorated or is unfit for use.

For use, dilute 1 part stock solution with 1 part water.

Normal developing time at 68° F. (20° C.) for Brovira, 2 to 6 minutes, for Convira, Cykon, Cykora and Indiatone, 1½ to 3 minutes.

Greater contrast can be obtained by using the developer stock solution full strength. Softer results can be obtained by diluting 1 part stock solution with 2 parts water.

AGFA 135 WARM-TONE PAPER DEVELOPER

This developer is recommended for rich, warm-black tones with Cykon, Convira, Cykora, Brovira, Indiatone and similar papers. This formula may be obtained in packaged form ready-to-use by ordering Agfa 135 Developer.

	Stock Solution			
	Metric		Avoirdupois	
Hot Water (125° F. or 52° C.).....	750 cc.	24 ounces	3 quarts	
Agfa Metol.....	1.6 grams	24 grains	96 grains	
Agfa Sodium Sulphite, anhydrous.....	24 grams	¾ oz. 20 gr.	3¼ oz.	
Agfa Hydroquinone.....	6.6 grams	96 grains	¾ oz. 60 gr.	
Agfa Sodium Carbonate, monohydrated.....	24 grams	¾ oz. 20 gr.	3¼ oz.	
Agfa Potassium Bromide.....	2.8 grams	40 grains	¼ oz. 50 gr.	
Water to make.....	1 liter	32 ounces	1 gallon	

For use, dilute 1 part stock solution with 1 part water. A properly exposed print will be fully developed at 68° F. (20° C.) in about 1½ to 2 minutes. Complete development may be expected to take slightly longer with rough-surfaced papers than with semi-glossy or luster-surfaced papers. For greater softness, dilute the bath with water up to equal quantities of developer and water. To increase the warmth, add bromide up to double the amount in the formula. The quantity of bromide specified in the formula, however, assures rich, warm, well-balanced tones.

AGFA 201
ACID HARDENING FIXER

This hardening fixing bath for use with either film or paper may be stored indefinitely and used repeatedly until exhausted. If the fixing bath froths, turns cloudy, or takes longer than 10 minutes to fix out completely, it must be replaced by a fresh solution.

Solution 1

	<i>Metric</i>		<i>Avoirdupois</i>
Hot Water (125° F. or 52° C.).....	500 cc.	16 ounces	½ gallon
Hypo.....	240 grams	8 ounces	2 pounds

Solution 2

Hot Water (125° F. or 52° C.).....	150 cc.	5 ounces	20 ounces
Agfa Sodium Sulphite, anhydrous.....	15 grams	½ ounce	2 ounces
Acetic Acid (28%).....	45 cc.	1½ ounces	6 ounces
Agfa Potassium Alum.....	15 grams	½ ounce	2 ounces
Add Solution 2 to 1 and add water to make.....	1 liter	32 ounces	1 gallon

Dissolve chemicals thoroughly in order given and stir rapidly while adding Solution 2 to Solution 1. Glacial Acetic Acid may be diluted to 28% concentration by adding 3 parts of acid to 8 parts of water. Do not dilute for use. Normal fixing time 5 to 10 minutes at 68° F. (20° C.).

AGFA 202
CHROME ALUM FIXER

This hardening fixing bath for use with films in hot weather should be used fresh, as it does not retain its hardening action.

Solution 1

	<i>Metric</i>	<i>Avoirdupois</i>
Hot Water (125° F. or 52° C.).....	2.5 liters	80 ounces
Hypo.....	960 grams	2 pounds
Agfa Sodium Sulphite, anhydrous.....	60 grams	2 ounces
Water to make.....	3 liters	3 quarts

Solution 2

Water.....	1 liter	32 ounces
Agfa Potassium Chrome Alum.....	60 grams	2 ounces
Sulphuric Acid C.P.....	8 cc.	¼ ounce

Slowly pour Solution 2 into Solution 1 while rapidly stirring the latter. Do not dilute for use. Do not dissolve the Chrome Alum at a temperature higher than 150° F. (66° C.). Always rinse films thoroughly before fixing. Normal fixing time 5 to 10 minutes at 68° F. (20° C.).

FIXING, SHORT-STOP AND HARDENING FORMULAS

AGFA 203

NON-HARDENING METABISULPHITE FIXER

This fixing bath is recommended for use when hardening is not desired. It is highly desirable for accuracy of registration in color work with Reprolith Film.

	<i>Stock Solution</i>	<i>Metric</i>	<i>Avoirdupois</i>
Hypo.....		1900 grams	4 pounds
Agfa Potassium Metabisulphite.....		270 grams	9 ounces
Water to make.....		4 liters	1 gallon

The Metabisulphite should be added only when the Hypo solution is cool.

For use, dilute one part stock solution with one part water. Normal fixing time 5 to 10 minutes at 68° F. (20° C.).

AGFA 210

ACID SHORT-STOP BATH

This solution is recommended for use between developer and fixer, to prevent staining of film negatives and prints. Agitate film negatives or prints for about 5 seconds in this bath before transferring to fixing solution.

	<i>Metric</i>	<i>Avoirdupois</i>
Acetic Acid 28%.....	45 cc.	1½ ounces
Water.....	1 liter	32 ounces

Glacial Acetic Acid (99.5%) may be diluted to the 28% concentration by mixing three parts of Glacial Acetic Acid with eight parts of water.

AGFA 216

CHROME ALUM HARDENING BATH

This bath may be used in place of the regular acetic acid short-stop to give additional hardening to film. It is particularly desirable in hot weather, for tropical development, and for negatives which have to be enlarged wet.

	<i>Metric</i>	<i>Avoirdupois</i>
Agfa Potassium Chrome Alum.....	30 grams	1 ounce
Water.....	1 liter	32 ounces

Films should be agitated thoroughly when immersed in the solution. Maximum hardening will be obtained with about three minutes treatment.

The solution should be used fresh as it does not keep well. Formation of a greenish sludge is an indication that the solution should be replaced by a fresh bath.

If the Chrome Alum used is such that sludge is formed when the bath is first used an addition of concentrated Sulphuric Acid (2 cc. per liter or ½ dram per 32 ounces) can be made to the solution to overcome this condition.

AGFA 221
SEPIA TONER

This toner is recommended for warm-brown sepia tones.

Solution 1

	<i>Metric</i>	<i>Avoirdupois</i>
Hot Water (125° F. or 52° C.).....	750 cc.	24 ounces
Agfa Potassium Ferricyanide.....	50 grams	1½ oz. 80 gr.
Agfa Potassium Bromide.....	10 grams	¼ oz. 35 gr.
Agfa Sodium Carbonate, monohydrated.....	20 grams	½ oz. 70 gr.
Water to make.....	1 liter	32 ounces

Solution 2

Agfa Sodium Sulphide.....	45 grams	1½ ounces
Water to make.....	500 cc.	16 ounces

For use as described below, dilute one part Solution 2 with eight parts water.

IMPORTANT—Be sure to use Sodium Sulphide, not Sodium Sulphite, in compounding the Redeveloper. Also use clean trays, free from exposed iron spots, especially with Bleaching Bath. Otherwise blue spots may form on prints.

Prints should be washed thoroughly and then bleached in Solution 1 until the black image is converted to a very light brown color (about 1 minute). Prints should then be washed for 10 to 15 minutes and redeveloped in diluted Solution 2.

Redevelopment should be complete in about 1 minute. After redevelopment the prints should be washed for about 30 minutes and then dried. If the toner should leave sediment which results in streaks or finger marks on the surface of the paper the print should be immersed for a few seconds in a 3% solution of acetic acid, after which a 10-minute washing is necessary.

AGFA 222
HYPO ALUM TONER

This toner is recommended for beautiful reddish-brown tones.

Solution 1

	<i>Metric</i>	<i>Avoirdupois</i>
Water.....	2350 cc.	80 ounces
Hypo.....	450 grams	15 ounces

Solution 2

Water.....	30 cc.	1 ounce
Agfa Silver Nitrate.....	1.3 grams	20 grains

Solution 3

Water.....	30 cc.	1 ounce
Agfa Potassium Iodide.....	2.7 grams	40 grains

Add Solution 2 to Solution 1. Then add Solution 3 to the mixture. Finally add 105 grams (3½ ounces) of Agfa Potassium Alum to this solution, and heat the entire bath to the boiling point or until sulphurization takes place (indicated by a milky appearance of the solution). Tone prints 20 to 60 minutes in this bath at 110-125° F. (43-52° C.). Agitate prints occasionally until toning is complete. Care should be taken to see that the blacks are fully converted before removing the prints from the toning bath, otherwise double tones may result.

AGFA 223

NELSON GOLD TONER

U. S. Pat. Number 1,849,245

With this toner it is possible to obtain a variety of pleasing brown tones by varying the time of toning. Prints may be removed from the bath when the desired color is reached. This formula is suitable for use with Cykora, Indiatone, Cykon, and Convira.

Solution 1

	Metric	Avoirdupois
Warm Water, about 125° F. (52° C.).....	4 liters	1 gallon
Agfa Sodium Thiosulphate (Hypo).....	960 grams	2 pounds
Ammonium Persulfate.....	120 grams	4 ounces

Dissolve the Hypo completely before adding the Persulfate. Stir vigorously while adding the Persulfate. If the bath does not turn milky, increase the temperature until it does.

Prepare following solution and add it (including precipitate) slowly to the Hypo-Persulfate solution while stirring the latter rapidly. *Bath must be cool when these solutions are added together.*

Cold Water.....	64 cc.	2 ounces
Agfa Silver Nitrate.....	5.2 grams	75 grains
Sodium Chloride.....	5.2 grams	75 grains

NOTE: *The Silver Nitrate should be dissolved completely before adding Sodium Chloride.*

Solution 2

Water.....	250 cc.	8 ounces
Agfa Gold Chloride.....	1 gram	15 grains

For use, add 4 ounces (125 cc.) of Solution 2 slowly to Solution 1 while stirring the latter rapidly.

The bath should not be used until after it has become cold and has formed a sediment. Then pour off the clear liquid for use.

Pour the clear solution into a tray standing in a water bath and heat to 110° F. (43° C.). The temperature, when toning, should be between 100° and 110° F. (38° and 43° C.). Dry prints should be soaked thoroughly in water before toning.

Keep at hand an untuned black-and-white print for comparison during toning. Prints should be separated at all times to insure even toning.

When the desired tone is obtained, rinse the prints in cold water.

After all prints have been toned, return them to the fixing bath for five minutes, then wash for one hour in running water.

The bath should be revived at intervals by the addition of further quantities of the gold Solution 2. The quantity to be added will depend upon the number of prints toned and the time of toning. For example, when toning to a warm brown, add 1 dram (4 cc.) of solution after each fifty 8 x 10 prints, or their equivalent, have been toned. Fresh solution may be added from time to time to keep the bath up to the proper volume.

AGFA 231 GOLD TONER

This formula gives a range of red tones to sepia-toned prints, the brilliance of the tone depending on the paper used. Brilliant chalk-red tones are produced on Cykon, while with Indiatone and Cykora darker shades are formed. If desired, deep blue tones may also be obtained with this formula by using black-and-white prints instead of prints that have first been sepia-toned. Unusual effects of mixed tones of blue-black shadows and soft reddish highlights can be produced by using prints which have been partially toned in a Hypo Alum sepia-toner.

	<i>Metric</i>	<i>Avoirdupois</i>
Hot Water (125° F. or 52° C.)	750 cc.	24 ounces
*Ammonium Sulphocyanate	105 grams	3 3/4 ounces
†Gold Chloride, 1% Solution	60 cc.	2 fluid oz.
Water to make	1 liter	32 ounces

For Red Tones: Prints must first be bleached and toned by sulphide redevelopment method (see Agfa 221). After washing, place prints in above solution until toning is complete (requires 15-45 minutes). For redder tones one-half the specified amount of sulphocyanate may be used.

For Deep Blue Tones: Omit sepia toning operation and place well-washed black-and-white prints directly in above toning solution.

For Mixed Tones: Prints should be incompletely toned in a Hypo Alum Toner, such as Agfa 222, and washed before treatment in above solution.

*May be substituted by:

Sodium Sulphocyanate.....110 grams 3 3/4 ounces

or

Potassium Sulphocyanate.....135 grams 4 1/2 ounces

†The contents of a 15-grain bottle of Agfa Gold Chloride dissolved in 3 1/2 ounces of water will give a 1% solution.

AGFA 241 IRON BLUE TONER

Producing brilliant blue tones, this formula is suitable for use with Cykora, Brovira and Indiatone Papers.

	<i>Metric</i>	<i>Avoirdupois</i>
Hot Water (125° F. or 52° C.)	500 cc.	16 ounces
Ferric Ammonium Citrate	8 grams	1/4 ounce
Agfa Potassium Ferricyanide	8 grams	1/4 ounce
Agfa Acetic Acid, 28%	265 cc.	9 ounces
Water to make	1 liter	32 ounces

Solution should be prepared with distilled water if possible. If enameled iron trays are used, no chips or cracks in the enamel should be present or spots and streaks may appear in the print.

Prints for blue toning should be fixed in plain, non-hardening hypo bath (which should be kept at a temperature of 68° F. or under to avoid undue swelling). When prints have been fully toned in the above solution, they will be greenish in appearance, but will be easily washed out to a clear blue color when placed in running water.

The depth of the blue toning will vary somewhat with the quality of prints toned in it, light-toned prints generally toning to lighter blues. Some intensification of the print usually occurs in toning; consequently, prints should be slightly lighter than the density desired in the final toned print.

Wash water should be acidified slightly with acetic acid since the blue tone is quite soluble in alkaline solutions and is considerably weakened when wash water is alkaline. Pleasing variations in the tone can be obtained by bathing the washed prints in a 1/2% solution (5 grams per liter) of Borax which produces softer, blue-gray tones, the extent depending on the length of treatment.

REDUCING AND INTENSIFYING FORMULAS

AGFA 310

FARMER'S REDUCER

This is a cutting reducer for lessening the density of heavy negatives and at the same time increasing their contrast. It is especially valuable for reproduction films to clear the whites.

Solution 1

	<i>Metric</i>	<i>Avoirdupois</i>
Hypo.....	240 grams	8 ounces
Water to make.....	1 liter	32 ounces

Solution 2

Agfa Potassium Ferricyanide.....	19 grams	$\frac{1}{2}$ oz. 55 gr.
Water to make.....	250 cc.	8 ounces

For use mix one part Solution 2 and four parts Solution 1 in 32 parts water. Solutions 1 and 2 should be stored separately and mixed immediately before use.

AGFA 311

FLATTENING REDUCER

This reducer is useful for lessening the density and contrast of heavy negatives.

Solution 1

	<i>Metric</i>	<i>Avoirdupois</i>
Agfa Potassium Ferricyanide.....	35 grams	1 oz. 75 gr.
Agfa Potassium Bromide.....	10 grams	$\frac{1}{4}$ oz. 40 gr.
Water to make.....	1 liter	32 ounces

Bleach in Solution 1 and after thorough washing, redevelop to desired density and contrast in Agfa 47 or other negative developer except fine-grain developers. Then fix and wash in usual manner. Conduct operation in subdued light.

AGFA 330

MERCURY INTENSIFIER

This intensifier is recommended for increasing the printing density of thin, flat negatives.

	<i>Metric</i>	<i>Avoirdupois</i>
Agfa Potassium Bromide.....	10 grams	$\frac{1}{4}$ oz. 35 gr.
*Mercuric Chloride.....	10 grams	$\frac{1}{4}$ oz. 35 gr.
Water to make.....	1 liter	32 ounces

Do not dilute for use. Negatives to be intensified must be very thoroughly washed first or yellow stains may result on the intensified negative. Immerse negatives in above solution until thoroughly bleached to the base of the film and then wash in water containing a few drops of hydrochloric acid. Redevelop bleached negatives in 5% Sodium Sulphite or any standard developer. Surface scum which forms during storage of the bleaching solution does not affect the bleacher but should be removed before using the solution.

*Poison—Danger.

AGFA 331
MONCKHOVEN'S INTENSIFIER
 (For Reproduction Films)

This formula gives very great intensification and contrast for line drawing and halftone reproduction work.

<i>Solution 1</i>		
	<i>Metric</i>	<i>Avoirdupois</i>
Agfa Potassium Bromide.....	23 grams	$\frac{3}{4}$ ounce
*Mercuric Chloride.....	23 grams	$\frac{3}{4}$ ounce
Water to make.....	1 liter	32 ounces
<i>Solution 2</i>		
Cold Water.....	1 liter	32 ounces
*Potassium Cyanide.....	23 grams	$\frac{3}{4}$ ounce
Agfa Silver Nitrate.....	23 grams	$\frac{3}{4}$ ounce

The silver nitrate and the potassium cyanide should be dissolved in separate lots of water, and the former added to the latter until a permanent precipitate is produced. The mixture is allowed to stand 15 minutes, and after filtering, forms Solution 2.

Place negatives in Solution 1 until bleached through, then rinse and place in Solution 2. If intensification is carried too far, the negative may be reduced with a weak solution of hypo.

*WARNING—Because of the deadly poisonous nature of this intensifier, it should be used with care and bottles containing it should be suitably marked. Never mix cyanide solutions with acids or use them in poorly ventilated rooms. Discard waste solutions into running water.

AGFA 332
CHROMIUM INTENSIFIER

This formula is recommended because it is convenient in use and gives permanent results. The degree and character of intensification can be controlled to an extent by modification of the developing time used for the redeveloper.

	<i>Metric</i>	<i>Avoirdupois</i>
Agfa Potassium Bichromate.....	9 grams	135 grains
Hydrochloric Acid.....	6 cc.	1.6 drams
Water to make.....	1 liter	32 ounces

Immerse negatives in this solution until bleached, wash for 5 minutes in running water, and develop in bright but diffused light in a Metol Hydroquinone developer such as Agfa 47. Negatives should then be given a 15-minute wash before drying. Intensification may be repeated for increased effect.

If any blue coloration of the film base is noticeable after intensification, it may be easily removed by washing the film for two or three seconds in water containing a few drops of ammonia, in a 5% solution of potassium metabisulphite, or in a 5% solution of sodium sulphite. This treatment should be followed by a thorough washing in water.

AGFA 351**PINAKRYPTOL GREEN DESENSITIZER**

This solution is suitable for treatment of exposed films previous to development, to permit increased dark-room illumination and greater safety for film inspection during development. This desensitizer is not recommended for high-speed, panchromatic films (except Superpan Press, for which it is preferable to Pinakryptol Yellow).

Stock Solution

	<i>Metric</i>	<i>Avoirdupois</i>
Pinakryptol Green.....	1 gram	15 grains
*Water to make.....	500 cc.	16 ounces

For use, dilute 1 part stock solution with 10 parts water. Immerse films for two minutes at 68° F. (20° C.) with room in total darkness, and then transfer to developing solution. After two minutes' development, films may be inspected for 10- to 15-second periods at one-minute intervals; illumination being supplied by a yellow-green safelight (such as Agfa A6 with 10-watt lamp) placed 2 to 3 feet distant. Desensitized films should be developed approximately 50 to 100% longer in Agfa 17 and 50% longer in Agfa 47 than non-treated films to obtain comparable gradation and shadow detail.

If preferred, the same stock solution may be used directly in the developer in the proportion: 1 part desensitizer, 30 parts developer. This procedure should not be followed with developers containing more than 1 gram per liter (15 grains per quart) of hydroquinone.

*Use of a 50-50 water-alcohol mixture for solution will improve the keeping qualities of the desensitizer.

AGFA 352**PINAKRYPTOL YELLOW DESENSITIZER**

A solution suitable for treatment of exposed films previous to development to permit increased darkroom illumination and greater safety for film inspection during development, this desensitizer is preferred for high-speed, panchromatic films (except Superpan Press).

	<i>Metric</i>	<i>Avoirdupois</i>
Pinakryptol Yellow.....	1 gram	15 grains
*Water to make.....	1 liter	32 ounces

Do not dilute for use. Immerse films for two minutes at 68° F. (20° C.) with room in total darkness, and then transfer to developing solution. After two minutes development, films may be inspected for 10- to 15-second periods at one-minute intervals; illumination being supplied by a yellow-green safelight (such as Agfa A6 with 10-watt lamp) placed 2 to 3 feet distant. Desensitized films should be developed approximately 50 to 100% longer in Agfa 17 and 50% longer in Agfa 47 than non-treated films to obtain comparable gradation and shadow detail.

This solution should be used as a separate bath and not mixed with developing solution.

*Use of a 50-50 water-alcohol mixture for solution will improve the keeping qualities of the desensitizer.

RAPID PROCESSING PROCEDURE

This procedure has been devised by the Agfa Ansco Research Laboratory to meet the requirements of those who must carry out finishing operations on exposed films in the shortest possible time. The two-solution method outlined below is intended primarily for sheet films used in news photography, and with favorable drying conditions will permit completion of developing, fixing, washing and drying operations in fifteen minutes or less. Great care should be taken to maintain cleanliness in all operations and to follow directions carefully.

Solution 1

	Metric	Avoirdupois	
Hot Water (125° F. or 52° C.)	750 cc.	24 ounces	3 quarts
Agfa Metol	5 grams	75 grains	½ oz. 75 gr.
Agfa Sodium Sulphite, anhydrous	30 grams	1 ounce	4 ounces
Agfa Hydroquinone	10 grams	¼ oz. 35 gr.	1¼ ounces
Water to make	1 liter	32 ounces	1 gallon

Solution 2

Hot Water (125° F. or 52° C.)	750 cc.	24 ounces	3 quarts
Agfa Sodium Carbonate, monohydrated	100 grams	3½ ounces	13½ ounces
Water to make	1 liter	32 ounces	1 gallon

Solutions 1 and 2 are stored separately and used separately. Both solutions may be used repeatedly, but Solution 2 should be replaced when it becomes badly discolored. Do not dilute for use.

For development, immerse films first in Solution 1, next in Solution 2, allowing 1-minute immersion in each solution (at 70° F. 21° C.) and using *continual agitation throughout the entire period*. Contrast can be controlled by altering time film is kept in Solution 2. Basic immersion time should be changed to 45 seconds for development at 75° F., 1 minute 15 seconds at 65° F.

STEP 2. SHORT STOP

Place films in conventional acetic-acid short-stop bath for five seconds. *Agitate thoroughly*. For temperatures over 70° F., dilute the short-stop bath with an equal volume of water.

STEP 3. FIXATION

Solution 3

Part A

	Metric	Avoirdupois	
Hot Water (125° F. or 52° C.)	500 cc.	16 ounces	2 quarts
Hypo	350 grams	11¾ ounces	3 pounds

Part B

Hot Water (125° F. or 52° C.)	150 cc.	5 ounces	20 ounces
Agfa Sodium Sulphite, anhydrous	15 grams	½ ounce	2 ounces
Acetic Acid (28%)	45 cc.	1½ ounces	6 ounces
Agfa Potassium Alum	15 grams	½ ounce	2 ounces
Add Part B to A and add water to make	1 liter	32 ounces	1 gallon

RAPID PROCESSING PROCEDURE

Transfer films to Solution 3 and agitate continuously for $1\frac{1}{2}$ minutes which should be sufficient for complete fixation. Solution should be replaced frequently as exhaustion slows rate of fixation and decreases hardening properties.

STEP 4. WASHING

Wash films in rapid stream of water for two minutes, making sure stream of wash water has access to both sides of film. Films to be stored permanently should be rewashed after immediate use has been filled.

STEP 5. DRYING

The degree of speed obtainable in this step of the procedure depends greatly upon the nature and suitability of the drying equipment. Minimum drying times of 1 to 2 minutes can be achieved through the use of Agfa Rapid Film Dryer solution followed by drying with mild heat in a strong current of air. Washed films should be placed in Agfa Rapid Film Dryer solution and then freed from *all* surplus liquid by squeegeeing them against a clean ferrotyping plate. Most rapid drying will be effected by suspending the negative between two 250-watt infra-red lamps which are spaced 8 inches apart and mounted in 8-inch metal reflectors. **WARNING**—Do not use reflectors that throw a concentrated beam because of the danger of too much heat. Use matte-surfaced reflectors. The film should be positioned so that its flat surfaces receive the direct rays of the lamps with one edge of the film facing into a draft of air supplied by a good electric fan *which should be operating whenever the lamps are on*—the draft of air from fan is essential, otherwise film emulsion will melt. This drying arrangement is for films 5 x 7 or under. Similar arrangements can be devised, but care must be taken to avoid excessive heat which will melt the emulsion. Before putting a drying unit of this sort in actual use, trial films should be dried and the spacing of lamps and fan adjusted to give most rapid drying without endangering the film negative.

DARKROOM PLANS














A printed folder giving suggestions for the planning and construction of a photographic darkroom has been prepared and is available on request. Photographers interested in building a new darkroom or adding to an old one will find the recommendations and the diagrams which cover both compact and general-duty darkrooms especially helpful. Inquiries should be addressed to the Service Department, Agfa Ansco, Binghamton, N. Y.

IDENTIFICATION OF AGFA SHEET FILMS

The notching system below identifies each film. When notch is in top edge of the upper right hand corner, film is emulsion side up.

This notching system applies only to $3\frac{1}{4} \times 4\frac{1}{4}$ " and larger sizes of Agfa Films. All sizes of Agfa sheet films smaller than $3\frac{1}{4} \times 4\frac{1}{4}$ " are marked with a single, shallow notch in the usual position. This small notch is used for identification of emulsion side only and not for indication of the emulsion type.

AGFA FILM NOTCHING CODE

SUPERSENSITIVE PLENACHROME	
PORTRAIT	
COMMERCIAL ORTHOCHROMATIC	
SUPER PLENACHROME PRESS	
TRIPLE S ORTHO	
SUPERPAN PORTRAIT	
TRIPLE S PAN	
SUPERSENSITIVE PANCHROMATIC	
ISOPAN	
COMMERCIAL PANCHROMATIC	
SUPERPAN PRESS	
COMMERCIAL	
PROCESS	

PHOTOGRAPHIC CHEMICALS AND PREPARATIONS

In ordering chemicals be sure to specify AGFA "Laboratory-Tested" Chemicals. Prepared especially for photographic use, Agfa Chemicals are clean, free running, easily soluble and of highest purity. Consult catalog P30 or price list P12 for complete listing of Agfa Photographic Chemicals.

If you prefer the convenience and time-saving advantages of prepared developers, ask your dealer for AGFA prepared developers and fixers. Supplied in several sizes, these prepared chemicals are ready-mixed and need only to be dissolved in water to make them ready for use. The following are a few of the preparations available:

17 (Fine-Grain) Developer	Acid Hypo
17A Replenisher	Rapid Fixer
47 Developer	Rodinal
47A Replenisher	Direct Sepia Toner
103 Paper Developer	Flemish Toner
125 Paper and Film Developer	Brovira Toner
135 Paper Developer	Mercury Intensifier

AGFA ANSCO

General Offices

BINGHAMTON, NEW YORK

BRANCHES

BOSTON, MASS.	210 Lincoln Street
NEW YORK CITY, N. Y.	245 West 55th Street
CINCINNATI, OHIO	229 East Sixth Street
JACKSONVILLE, FLA.	121 Julia Street
CHICAGO, ILL.	433 East Erie Street
SAN FRANCISCO, CALIF.	548 Mission Street
LOS ANGELES, CALIF.	1224 South Hope Street
DALLAS, TEXAS	425 South Field Street

IN CANADA

AGFA ANSCO LIMITED, 60 Front St. West, Toronto, Ont.

Revised to June, 1941

P19-61-25 TM Reg. U. S. Pat. Off. Printed in U. S. A.





VIEWS OF
OFFICES AND PLANT OF
AGFA ANSCO
BINGHAMTON, N. Y.

